


Screening MultiScreen™ MSA

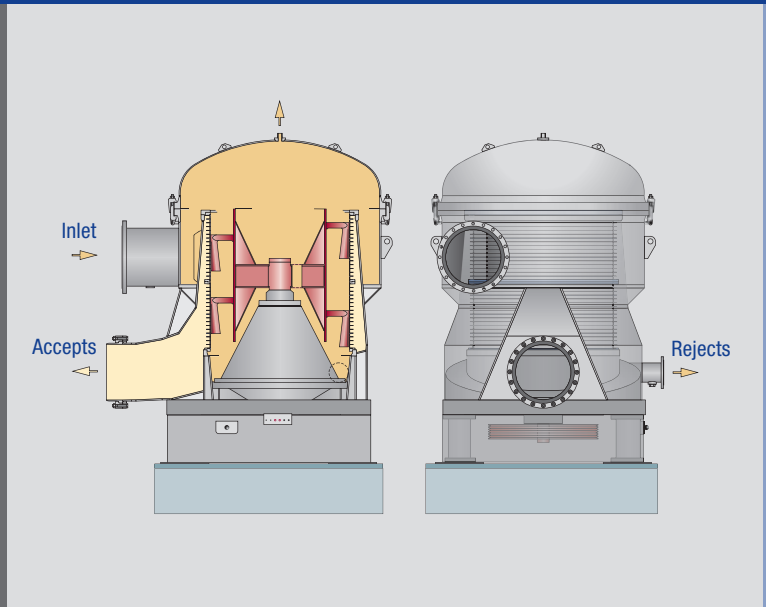

Applications

- Low consistency hole or slot screening
- For approach flow and stock preparation systems

Technical data

- Throughputs up to 1500t/24h depending on stock, technical and technological factors
- 11 sizes with an overall screen area from 0.4 - 13m²

Features

- Optimized flow conditions in the inlet and accept zones ensure:
- Uniform flow through the screen basket
 - High screening efficiency
 - Minimum fractionation

Your advantages:

- Low energy consumption
- No stringing
- Deposit-free


- Virtually pulsation-free
The MultiScreen MSA is therefore particularly suitable for use in the approach flow directly upstream of the headbox

Voith Paper Fiber Systems
GmbH & Co. KG
Escher-Wyss-Straße 25
88212 Ravensburg/Germany
Tel. +49 751 8301
Fax +49 751 832050

Voith Paper Inc.
2200 N. Roemer Road
Appleton, WI 54911/USA
Tel. +1 920 731-7724
Fax +1 920 731-0240

Voith Paper S.A.
Rua Friedrich von Voith, 825
02995-000 São Paulo-SP/Brazil
Tel. +55 11 39 44-4354
Fax +55 11 39 44-4848

www.voithpaper.com

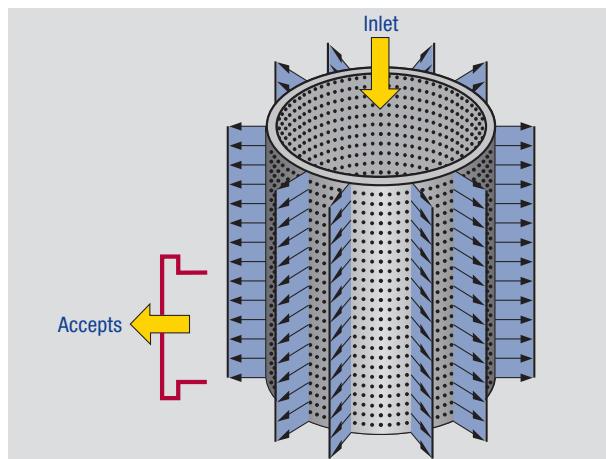

*Ideal flow through a screen basket
The hole/slot velocity is constant*

VOITH
Engineered reliability.