


Dispersion Equalizing screw SEG.S

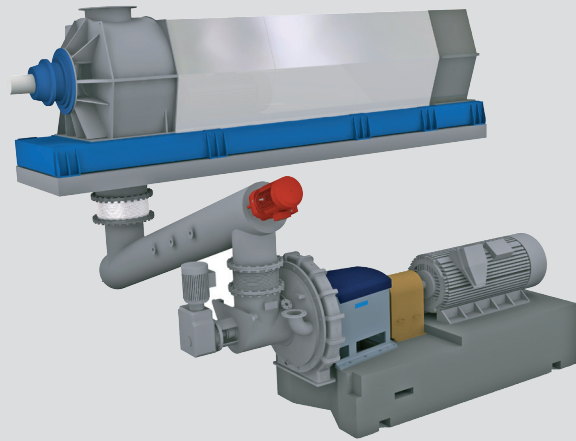

Your requirements

- Stock transportation from press to direct heated disperser
- Equalization of stock flow

Our solutions

- Special discharge design for uniform stock supply to the disperser
- Designed for inclination up to 40°

Your benefits

- Stable disperser operation for consistent pulp quality
- Low energy stock transportation and homogenization

Technical data

Size	SEG80S	SEG150S	SEG250S	SEG450S	SEG600S	SEG750S	SEG900S	SEG1100S
Max. throughput [t/24 h]	80	150	250	450	600	750	900	1100
Stock consistency range [%]	25 - 35							
Max. installed power [kW]	5.5	7.5	15	30	37	45	55	75
Speed [1/min]	239	226	179	126	119	100	90	75
Inclined angle [°]	up to 40							
Diameter [mm]	355	406	508	711	813	914	1016	1220
Length [mm]	3500	4000	4500	5000	5500	5500	6000	6500

Voith Paper Fiber Systems
GmbH & Co. KG
Escher-Wyss-Straße 25
88212 Ravensburg, Germany
Tel. +49 751 83 01
Fax +49 751 83 2050
info.vpr@voith.com

Voith Paper AS
Joseph Kellers vei 20
3408 Tranby, Norway
Tel. +47 32 85 91 00
Fax +47 32 85 01 05

Voith Paper Inc.
2200 N. Roemer Road
Appleton, WI 54911, USA
Tel. +1 920 731 7724
Fax +1 920 731 0240

Voith Paper S.A.
Rua Friedrich von Voith, 825
02995-000 São Paulo-SP, Brazil
Tel. +55 11 3944 4354
Fax +55 11 3944 4848

www.voithpaper.com

VOITH
Engineered reliability.